

GS-102 M

Features

External dimensions.	1410 x 750 x 1440 mm.
Weight.	147 Kg.
Dimensions of racks.	2 of 500 x 500 mm.
Output racks hour.	60 / 120
Output hour.	1280 / 1920 plates.
Usable height.	400 mm.
Total power.	15 Kw.
Wash pump power.	2x1,5 Kw. 2x500 l/min.
Boiler element heater.	6 Kw. Triphasic
Tank element heater.	6 Kw. Triphasic
Voltaje.	400V. / III / 50-60 Hz. 230V. / III / 50-60 Hz.
Wash cycle.	1 / 2 minutes
Water consumption by rinsing.	2x3 Litres
Wash tank.	2x58 Litres
Boiler capacity.	2x8 Litres
Numbers of wash arms upper.	2x4
Numbers of wash arms bottom.	2x4
Numbers of jets.	2x48
ø jets.	ø 6 mm.
Rinse jets upper.	2x8
Rinse jets bottom.	2x8
Water inlet.	3/4"
Pressure for the water supply.	2 - 4 bars. 200 - 400 Kp
Required flow.	30 Litres / minute aprox.
Drain.	ø ext. valve 28 mm. ø tube 32 mm. ext.



Endowment

- 4 Plates racks
- 2 Universal rack
- 4 Cutlery basket
- 1 Water inlet hose
- 2 Drain hose



Control panel

High-visibility front and easy to use.




Extraction arms

.Extraction system
Arms straight forward PULL UP
For easy cleaning.



Tanks

AISI 316 stainless steel
rounded-corner pressed
tank without welding

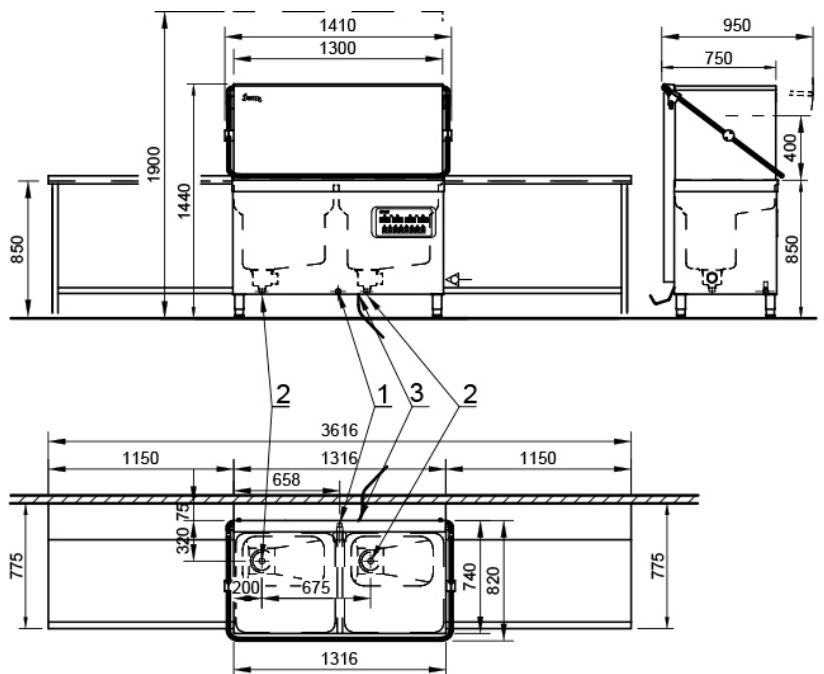

Index

1. Water inlet 3/4" max. 60° C.
 2. Drain ø 50 mm.
 3. Cable length 1,5 m.
230V. III 4x6 mm.
400V. 5x4 mm.
- Power: 230 V. / III / 15 Kw.
400 V. / III / 15 Kw.

